

## PRODUCT INFO

# REDUCED SHANK HSS DRILL BIT

## SN12 SERIES




### DESCRIPTION

Sutton Reduced Shank HSS Drill Bits are engineered to enhance drilling capacity in 13mm chucks, ideal for slow speed, large scale boring (350 RPM or less). Each bit is 152mm long with an 86mm flute length and a 118° standard point, suitable for general purposes. Constructed from M2 High Speed Steel (HSS), they provide superior strength, heat, and wear resistance. Featuring a blue surface finish, these bits excel in ferrous applications, while their steam oxide finish minimizes chip build-up and cutting friction, particularly in low carbon steels.

### APPLICATION

Ideal for drilling into ferrous metals, steel, Aluminium, and plastic.

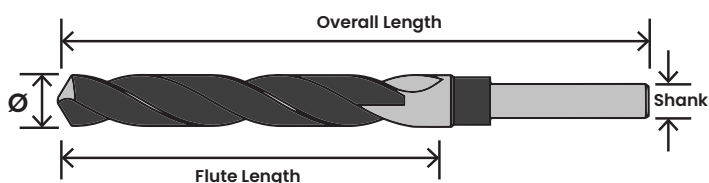

SKU	BARCODE	DIAMETER	LENGTH	FLUTE	SHANK	POINT ANGLE	QUANTITY	PACKAGING	WEIGHT
SN12-1400	9311963005300	14mm	152mm	86mm	1/2" (12.7mm)	118°	1 Pack	Tube	139g
SN12-1600	9311963004990	16mm	152mm	86mm	1/2" (12.7mm)	118°	1 Pack	Tube	162g
SN12-1800	9311963008776	18mm	152mm	86mm	1/2" (12.7mm)	118°	1 Pack	Tube	185g
SN12-1900	9311963008097	19mm	152mm	86mm	1/2" (12.7mm)	118°	1 Pack	Tube	196g
SN12-2000	9311963004624	20mm	152mm	86mm	1/2" (12.7mm)	118°	1 Pack	Tube	216g