

PRODUCT INFO


CUTTING WHEEL

METAL/STEEL



DESCRIPTION

Robtec Cutting Wheels offer precision and efficiency for metal and steel cutting needs. Featuring a distinctive color and pattern-coded label system, with blue denoting suitability for metal and steel, these flat abrasive wheels ensure high performance and sharpness. Crafted with fiberglass nets for enhanced safety, they meet ISO 9001 standards, guaranteeing quality assurance. Proudly manufactured in China, they combine affordability with top-notch safety measures, contributing to a greener planet while delivering superior cutting results.

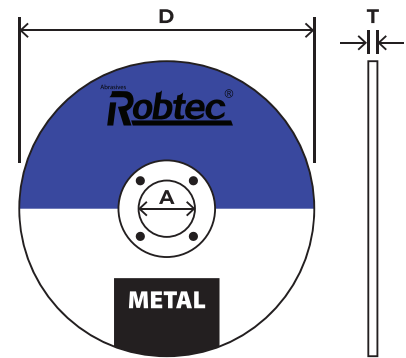

| SKU | BARCODE | DIAMETER (D) | THICKNESS (T) | ARBOR (A) | ABRASIVE GRAIN | GRIT SIZE | HARDNESS GRADE | MAX SPEED | WORKING SPEED | WEIGHT |
|--------------|---------------|--------------|---------------|-----------|----------------|-----------|----------------|------------|---------------|--------|
| CO100A16 | 9419678360018 | 100mm | 3.2mm | 16mm | Aluminum Oxide | 30 | R | 15,300 RPM | 80 m/s | 54g |
| CO100A16-1MM | 9419678360032 | 100mm | 1.2mm | 16mm | Aluminum Oxide | 60 | R | 15,300 RPM | 80 m/s | 22g |
| CO115A22 | 9419678360070 | 115mm | 3.2mm | 22.2mm | Aluminum Oxide | 30 | R | 13,290 RPM | 80 m/s | 66g |
| CO115A22-1MM | 9419678360094 | 115mm | 1.2mm | 22.2mm | Aluminum Oxide | 30 | T | 13,290 RPM | 80 m/s | 27g |
| CO125A22 | 9419678360131 | 125mm | 3.2mm | 22.2mm | Aluminum Oxide | 30 | R | 12,200 RPM | 80 m/s | 83g |
| CO125A22-1MM | 9419678360155 | 125mm | 1.2mm | 22.2mm | Aluminum Oxide | 60 | T | 12,200 RPM | 80 m/s | 33g |